

CABINET ACCESSORIES



Standard Flushmounted keyed lock (LOCK 1991)

- Flush-mounted keyed lock comes standard on all cabinets. Default key #751 for all doors & side panels.




Flushmounted keyed lock (LOCK 1992)

- Flush-mounted keyed lock have choice of 20 different key tumblers



3 point NEMA style lock (HANDLE, BMP 01)

- Swing handle with optional 3-point closure for added security. Available with or without hasp

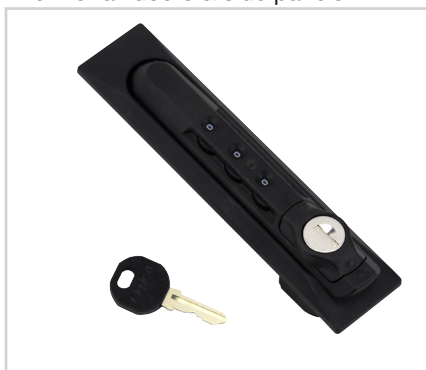

3-Point keyed combo lock (HANDLE, 1155-U1)

- Swing handle with combo lock and optional 3-point closure for added security.



(multiple rolls shown)

Velcro (CT-VL-8-B)

- 8" tie wraps
(comes in pack of 100 pieces)



Finger Gasket (CTC-41-FG-B)

- Finger gasket for increased protection from dust at cable ending locations



LED Light (CT-ULT12)

- LED light with touch feature.



Ganging Kit (CTC-GK-60-B)

- Used to gang multiple cabinets together. Kit includes bolt, nut, 2 washers and ground lug.



Bonding Straps (CTC-BONDSTRAP-12)

- 12" Bond strap



1U Regular Filler Panel (CTH-FP-1U-B)

All panels fit 19" rack. Comes in standard sizes ranging from 1-8 U-space. For tapped mounting rails.



1U Tool-Less Filler Panel (CTH-FP-1UC-B)

All panels fit 19" rack. Comes in standard sizes ranging from 1-8 U-space. For cage nut mounting rails.



2U Regular Filler Panel (CTH-FP-2U-B)

All panels fit 19" rack. Comes in standard sizes ranging from 1-8 U-space. For tapped mounting rails.




2U Tool-Less Filler Panel (CTH-FP-2UC-B) All panels fit 19" rack. Comes in standard sizes ranging from 1-8 U-space. For cage nut mounting rails.



4U Tool-Less Filler Panel (CTH-FP-4UC-B) All panels fit 19" rack. Comes in standard sizes ranging from 1-8 U-space. For cage nut mounting rails.




Extension Chimney (CMS-EXT-24-B) Also available in 36" and 48" lengths (CMS-EXT-36-B and CMS-EXT-48-B).

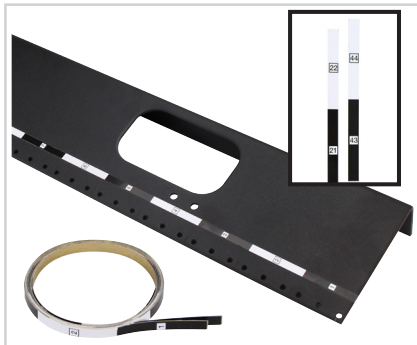

U-Space Labels (LABEL, MTG ANGLE)

Mounting Angle Labels, 1-22 & 23-44 x 75

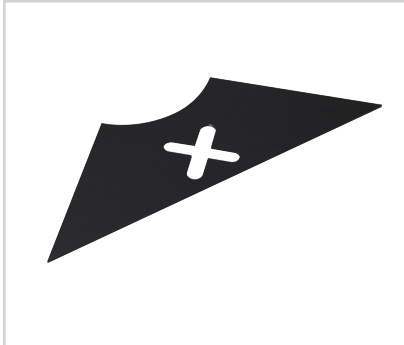

Anchor Plates (CTC-AP-9x9-B)

(Set of 4) Plates secure cabinet to the floor. Meets UBC Zone-4 Seismic anchoring requirements.



Sound Dampening

- 1" thick acoustic insulation that is permanently glued to the inside of the doors and side panels.



Equipment Support Bracket (CTCS-FAJ-SUP-BKT-1UB)

Provides added support to heavy equipment installed in cabinets.

- 4 position mounting • 1.25" lip
- Adjusts 21"- 36" along depth of cabinet
- Sold in sets of 2




Casters

- 3" Swivel and 3" Fixed casters available in sets of 4, kit includes caster mounting plate • 600 lb capacity

Leveling Feet

- 1/2"-13 thread • 3" Length
- Custom off-set leveling wrench available

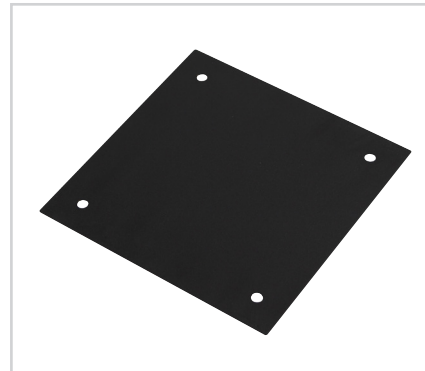

Cover Plate (CTC-44-B)

- 4"x4" cover plate for knock outs

Screws & Cage Nuts

Screws and Caged nuts available,
Nut, Caged 10-32 K, bag of 100
Nut, Caged 12-24 K, bag of 100
Screw, 10-32 K, bag of 100
Screw, 12-24 K, bag of 100