

WALL MOUNT INDUSTRIAL CABINET ACCESSORIES

Key Lock

- Flush-style key lockable doors available front and rear.



Cooling

- Fans for thermal load management available. Optional filter kit is recommended.



Gasketing

- Gasketing for NEMA/Harsh environment applications available. Gasketing is 1 piece extruded neoprene, attached by 3M heat sensitive adhesive.

Electronic Locking

Sound Dampening

To reduce the transmitted noise levels of the server space, CableTalk can permanently adhere acoustic insulation to the inside of full size cabinets or wall mount cabinets.


- 1" thick acoustic insulation is manufactured from inorganic glass fiber bonded with a thermosetting binder and has a black mat bonded to the surface which faces the airstream.
- Insulation is permanently glued to the inside of door, sides, top and bottom of cabinet.



WALL MOUNT INDUSTRIAL CABINET ACCESSORIES



CTCWH-4428-DDSO-08EX

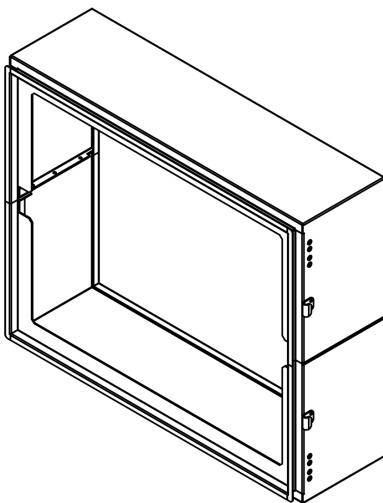

CTCWH-2128-DDSO-08EX

Wall Mount Extension Kit

Finish

- Black texture powder paint finish

Structure

- For use with Wall Mount-Industrial Cabinet.
- Extends depth by 8" to a usable depth of 28.5".
- Retrofittable two piece construction bolts together for easy installation.
- Uses existing hinges and latches from Wall Mount-Industrial Cabinet.
- Frame constructed of 16GA (0.060") steel

Note: Must be installed to industry and CableTalk standards

Standard Dimensions

Wall Mount Extensions

Part No.	Overall Width (inches)	Overall Height (inches)	Extension Depth (inches)	Usable Depth (inches)
CTCWH-2128-DDSO-08EX	28.5	23.5	8.0	28.5
CTCWH-4428-DDSO-08EX	28.5	44.5	8.0	28.5



Latch Side



Hinge Side