


SEISMIC ZONE 4 CABINET FRAME

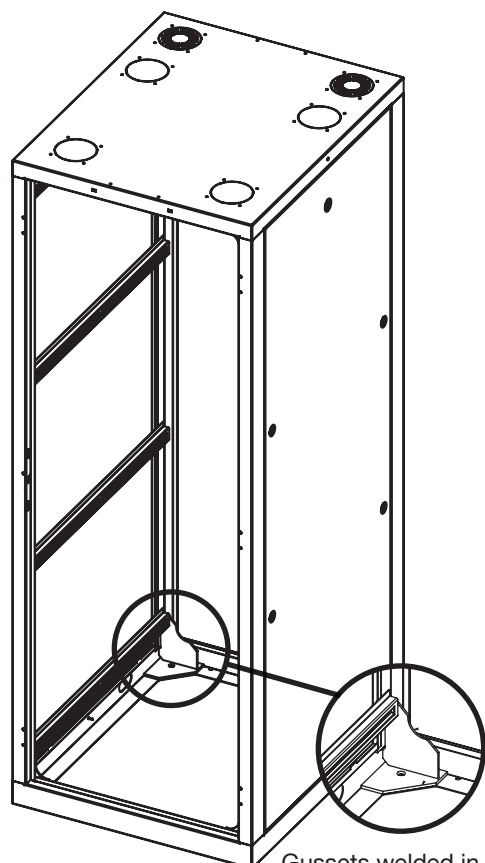

Gussets welded in place to add strength required for Z4, 8 places per frame

Product Features

Finish

- Durable black textured powder paint finish

Structure

- Frame constructed of rugged 13GA steel
- Each frame has gussets welded in 8 places for added strength
- Fully welded for rigidity
- 83" tall cabinet, with up to 44 U-Space of vertical capacity
- Third party certified for Zone 4 requirements
- Requires specific doors and sides panels for Zone 4 requirements
- Doors must be equipped with 3 point locks, see pictures on next page
- Side panels bolt to frame in 4 places
- Includes provisioning for 4 ground lugs (1 supplied)
- Cabinet frame must bolt to floor

Options

Zone 4 rated cabinet frames support the CableTalk products:

- Cover plates • Shelves • Mounting angles
- Power solutions • Cooling fans • Cable Management System ("CMS")
- Other sizes available that meet these requirements



(View of bottom half inside door, showing 3 point lock mechanism)

Standard Dimensions

Zone 4 Rated Cabinet Frame

| Part No. | Description | Width (Inches) | Depth (Inches) | Height (Inches) | U-Space |
|----------------|---|----------------|----------------|-----------------|---------|
| CTC3-3036-Z4-B | Seismic Zone 4 Cabinet Frame (36" Deep) | 30" | 36" | 83" | 44 |
| CTC3-3042-Z4-B | Seismic Zone 4 Cabinet Frame (42" Deep) | 30" | 42" | 83" | 44 |

Required Items for Zone 4 Frame

| | Description | Part No. | Cabinet Size (Inches) | Height (Inches) |
|------|---------------------------------------|-------------------|-----------------------|-----------------|
| Door | Lexan windowed door with 3 point lock | CTC3-30-013P-Z4-B | 30" W | 83 |
| | Solid door with 3 point lock | CTC3-30-063P-Z4-B | 30" W | 83 |
| | Louvered door with 3 point lock | CTC3-30-083P-Z4-B | 30" W | 83 |
| Side | Solid side panel | CTC3-36-11N4-B | 36" D | 83 |
| | Solid side panel | CTC3-48-11N4-B | 48" D | 83 |