

STANDARD CABINET FRAMES



Product Features

Finish

- Black textured powder paint finish


Structure

- Frame constructed of rugged 13GA steel
- Fully welded for rigidity
- 83" tall cabinet, with up to 44 U-Space of vertical capacity
- Comes standard with 4 adjustable leveling feet
- Maximum opening in the base of the cabinet
- Standard mounting locations for left or right opening doors
- Full horizontal adjustment for shelving and components
- Includes provisioning for 4 ground lugs (1 supplied)
- "Flex Top" design allows for multiple configurations

Options

Standard cabinet frames support the full line of CableTalk:

- Doors
- Cover plates
- Shelves
- Power solutions
- Ganging kit
- Extension Chimneys
- Fan/cable knock-outs
- Side panels
- Mounting angles
- Cable Management System
- Casters, swivel and fixed
- Cooling fans
- Cable trough
- Chimney top

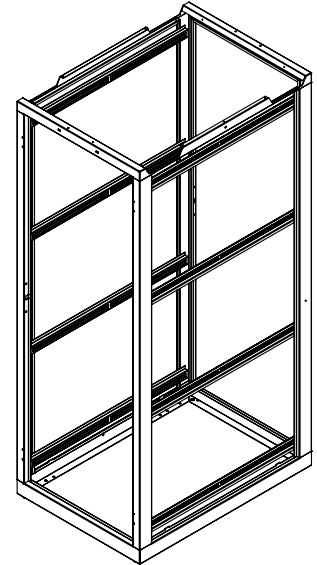

CTC3-3042-B



Mounting angles sold separately. Shown with optional caster plates.

Perforated top construction available. Check Flex-top flyer for part number.
Other sizes available on request

Note: All of our cabinets are fully customizable. If desired options are not listed, speak with your CableTalk representative.

Standard Dimensions

Standard Frames

Part No.	Description	Width (Inches)	Depth (Inches)	Height (Inches)	U-Space
CTC3-2436-B	24W x 36D x 83H Frame	24	36	83	44
CTC3-2442-B	24W x 42D x 83H Frame	24	42	83	44
CTC3-3030-B	30W x 30D x 83H Frame	30	30	83	44
CTC3-3036-B	30W x 36D x 83H Frame	30	36	83	44
CTC3-3042-B	30W x 42D x 83H Frame	30	42	83	44
CTC3-3048-B	30W x 48D x 83H Frame	30	48	83	44

Caster Plate Kits

Part No.	Description	Width (Inches)
CTC-K-48-24CAB	Caster plate kit for 24W cabinet	24
CTC-K48-30CAB	Caster plate kit for 30W cabinet	30

Note:

- Caster plate must be specified at time of purchase for factory installation.
- Caster option ordered with frame will be factory installed.



www.cabletalk.com | info@cabletalk.com
Canada & USA 1-800-267-7282
DATA SUBJECT TO CHANGE WITHOUT NOTICE

Section 1.2
Page 7

COLE-CT-TM 2025-12-09