2-POST
KNOCK DOWN RACKS

CTR-1977-DS-KD-B-12
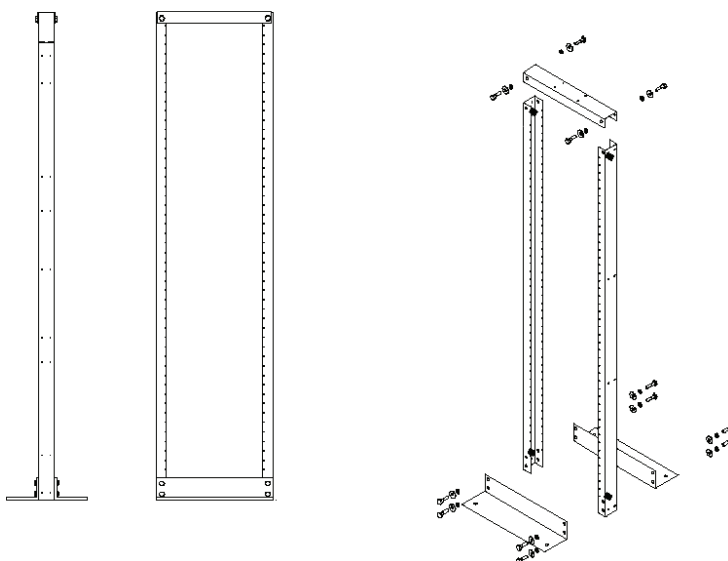
Product Features
Finish
• Durable black textured powder paint finish

Structure
• Frame constructed of rugged 11 GA (0.120") steel
• Knock-down racks bolt together for ease of handling and assembly
• Comes standard in 19" EIA width, with 12-24 tapped mounting holes and permanently marked U-spacing identification
• 5/16" Sturdy steel base with anchor holes for mounting to floor
• Rack is standard with 1 ground stud
• Ships knockdown in box with dimensions of 6.5"x7"x27" for the base and 2.5"x4"x84 for the uprights, and total weight of 90 lbs.

Options
• Mounts rack shelves and cable management systems, as well as 19" EIA standard hardware
• Pre-configured mounting holes can be used to mount a variety of cable management systems or for ganging racks together
• Available in 23" EIA spacing
• Rack and CMS combination kits available

Standard Dimensions
Knock-down Racks

Part No.	Style	Mounting Width (EIA)	Overall Height (Inches)	Usable Space (Inches)	Vertical CMS
CTR-1977-DS-KD-B-12	Double Sided 12/24	19	83	77	-
CTRM-1977-DS-KD-1	Double Sided 12/24	19	83	77	1 CMS-16
CTRM-1977-DS-KD-2	Double Sided 12/24	19	83	77	2 CMS-16

UL LISTED ITT Equipment Enclosure 2CF7   CSA®

CableTalk Custom Data Center Solutions

www.cabletalk.com | info@cabletalk.com
Canada & USA 1-800-267-7282
DATA SUBJECT TO CHANGE WITHOUT NOTICE

Section 2.4
Page 31
COLE-CT-TM 2025-12-09