FAN
ASSEMBLIES

Product Features:
- 120mm, 97 cfm cooling fans
- Available in 1,2, or 4 fan position mount on a single power cord
- Fits fan knock-outs on all cabinets
- Includes wire guard

Fans
- 120 x 120 x 38.5mm aluminum frame
- Rated for 110 V AC 50/60 Hz
- 46.4 / 48.1 dB for minimal noise
- 2500 / 2700 RPM
- 97 / 107 CFM (Max. at zero static pressure)
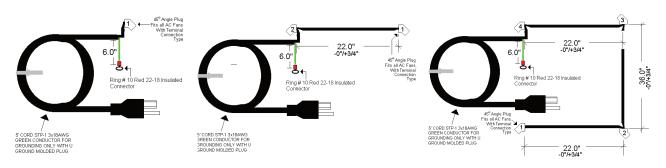- 0.23 / 0.26 Inch H20 (Max. at zero air flow)
- Terminal connections

Cord Set
- Standard grounded plug
- 5' cord
- 22 additional inches between fan connectors
- Connects to terminal type connections on fans
- Cannot be sold separately

Options:
- Available 1, 2 or 4 fan assemblies
- Fan filter assembly, CTC-FF, and Finger Guards, CT-FG, can be installed with the fan assemblies and are sold separately.

Note: All fan assemblies are compliant with all CableTalk installations

CTC-FA-1

CTC-FA-2

CTC-FA-4

Standard Dimensions
Fan Assemblies

Part No.	Style	Kit Includes
CTC-FA-1	1 position	1 position cord set, 1 fan
CTC-FA-2	2 position	2 position cord set, 2 fans
CTC-FA-4	4 position	4 position cord set, 4 fans

CableTalk ®
Custom Data Center Solutions

www.cabletalk.com | info@cabletalk.com
Canada & USA 1-800-267-7282
DATA SUBJECT TO CHANGE WITHOUT NOTICE

Section 1.7
Page 23
COLE-CT-TM 2025-12-09