


SEISMIC ZONE 4 CABINET FRAME

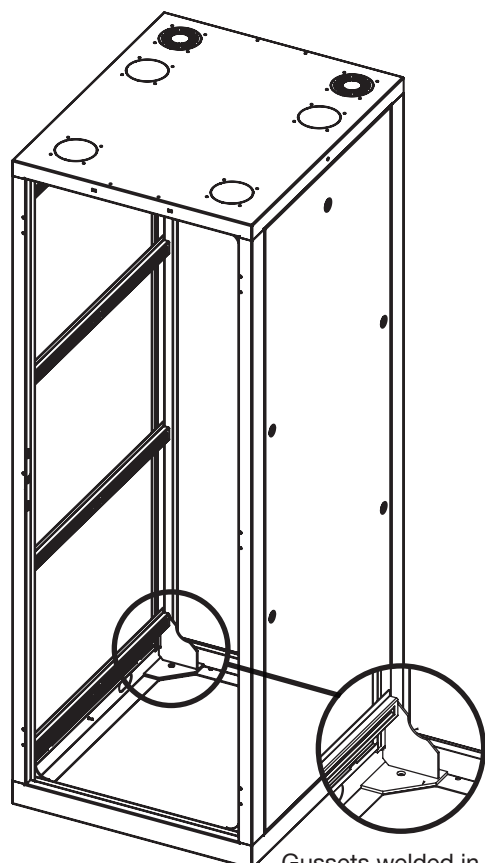

Gussets welded in place to add strength required for Z4, 8 places per frame

Product Features

Finish

- Durable black textured powder paint finish


Structure

- Frame constructed of rugged 13GA steel
- Each frame has gussets welded in 8 places for added strength
- Fully welded for rigidity
- 83" tall cabinet, with up to 44 U-Space of vertical capacity
- Third party certified for Zone 4 requirements
- Requires specific doors and sides panels for Zone 4 requirements
- Doors must be equipped with 3 point locks, see pictures on next page
- Side panels bolt to frame in 4 places
- Includes provisioning for 4 ground lugs (1 supplied)
- Cabinet frame must bolt to floor

Options

Zone 4 rated cabinet frames support the CableTalk products:

- Cover plates • Shelves • Mounting angles
- Power solutions • Cooling fans • Cable Management System ("CMS")
- Other sizes available that meet these requirements

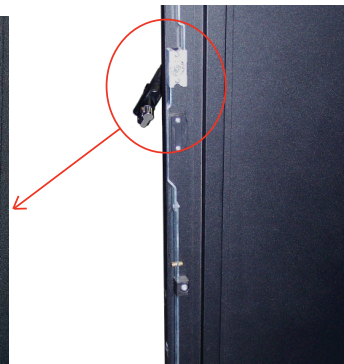

(View of bottom half inside door, showing 3 point lock mechanism)

Standard Dimensions

Zone 4 Rated Cabinet Frame

Part No.	Description	Width (Inches)	Depth (Inches)	Height (Inches)	U-Space
CTC3-3036-Z4-B	Seismic Zone 4 Cabinet Frame (36" Deep)	30"	36"	83"	44
CTC3-3042-Z4-B	Seismic Zone 4 Cabinet Frame (42" Deep)	30"	42"	83"	44

Required Items for Zone 4 Frame

	Description	Part No.	Cabinet Size (Inches)	Height (Inches)
Door	Lexan windowed door with 3 point lock	CTC3-30-013P-Z4-B	30" W	83
	Solid door with 3 point lock	CTC3-30-063P-Z4-B	30" W	83
	Louvered door with 3 point lock	CTC3-30-083P-Z4-B	30" W	83
Side	Solid side panel	CTC3-36-11N4-B	36" D	83
	Solid side panel	CTC3-48-11N4-B	48" D	83